



Lumistrips

DATASHEET

NICHIA UVC UVB LINEAR LED MODULE 12 X NICHIA LEDS 280-308NM 744-2400MW

SKU: NICHIA_UVC_MODULE




NICHIA UVC UVB LINEAR LED MODULE 12 X NICHIA LEDS 280-308NM 744-2400MW

Article number (SKU)		nichia_uvc_module	
Product name	Nichia UVC UVB Linear LED Module 12 x Nichia LEDs 280-308nm 744-2400mW		
Classification	Professional		
Photometric data (at T _J = 65°C, ± 10%)			
Light color	UV		
Binning	*		
Dominant wavelength (nm)	280 - 308 nm*		
Radiant power (mW)	744 - 2400 mW*		
Beam angle FWHP	110°		
Electrical data (at T _J = 65°C, ± 10%) (reference settings)			
Operating mode	Constant current		
Voltage (V)	*		
Current (mA)	1050 - 1500 mA*		
Power (W)	*	*	
Dimmable	Yes		
Dimensions / Mechanical data		Metric units	Imperial units
Length	281 mm	11.06"	
Width	19.2 mm	0.75"	
Height	4 mm	0.15"	
Number of LEDs (pcs)	12 pcs		
Weight (g)	*		
Heat dissipation	Yes, cooling necessary		
Temperatures			
Operating temperature at T _c	-40 °C to +65 °C		
Ambient temperature	-40 °C to +50 °C		
Storage temperature	-40 °C to +100 °C		
Approvals / Certifications			
CE / RoHS / Reach	Yes		
EN 62471 Risk group	RG3		
Energy efficiency class	*		
Version			
Date	08. June 2024		

*Custom made LED strip, values depend on customer selection. Datasheet for the configured custom made variant will be provided after order confirmation.



NICHIA UVC UVB LINEAR LED MODULE 12 X NICHIA LEDS 280-308NM 744-2400MW

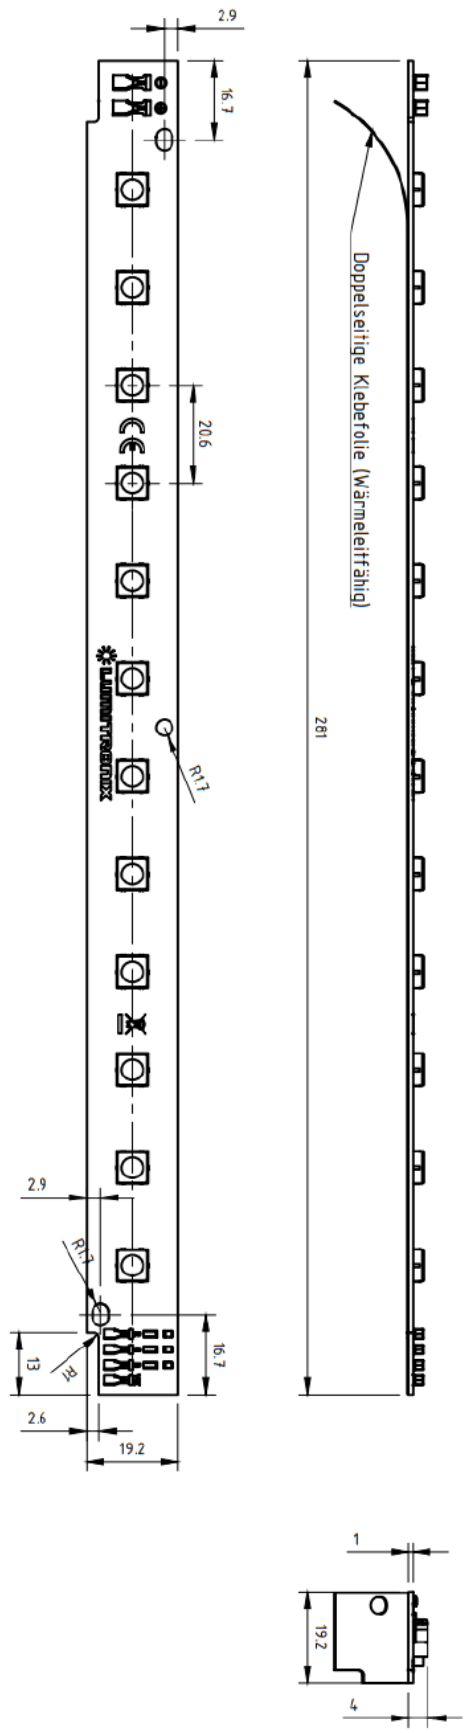


3





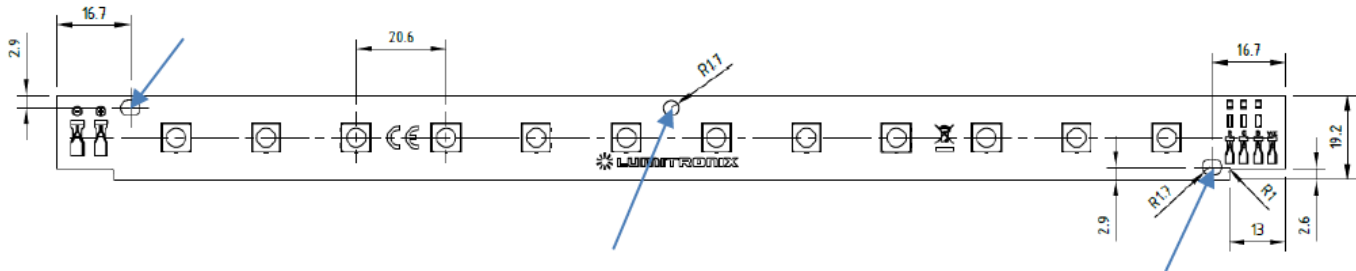

INSTALLATION OF THE UVC LED MODULE:

Wear gloves during installation to protect the UVC LED module from dirt and stains. Installation is carried out using 3 different drill holes (3 mm diameter) and thermally conductive adhesive foil. See the following picture:

UVC LED-Modul:



CONNECTION OF THE UVC LED MODULE:


-  [+] CC Power supply connection
-  [-] GND Power supply connection
-  [+] 12 V Status LEDs
-  GND red LED
-  GND green LED
-  GND blue LED

MANUFACTURING INFO

 **made
in
Germany**



The LED Module is **made in Germany**, at a production line that uses the innovative manufacturing technology of plasma direct metallization, to turn substrates into electrical conductive and solderable circuit boards, even those that before have not been suitable for an assembly with electronic components.

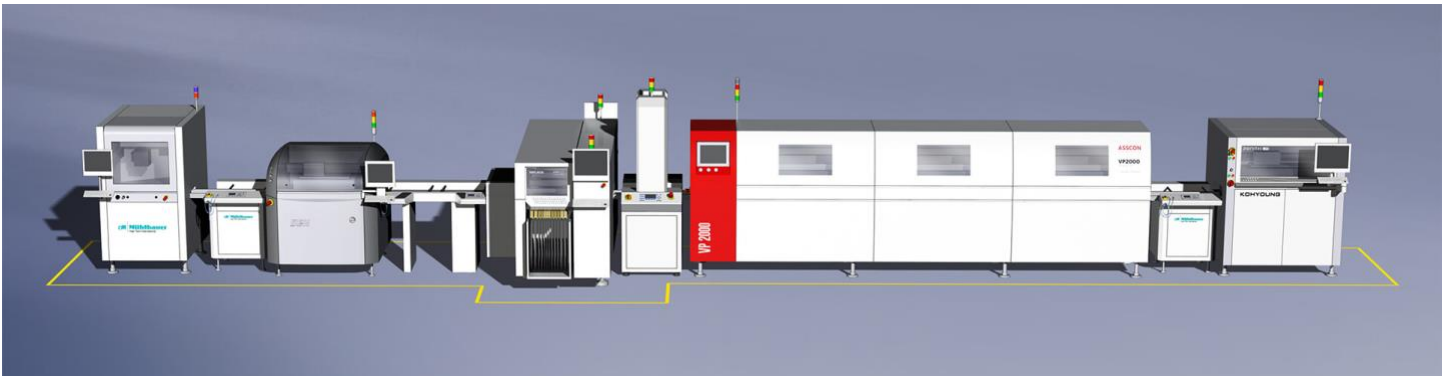

This LED strip is made on a ISO-certified production line that has been tailored specifically to the requirements of assemblies with LED technology. Nearly one million components can be processed per day in the production line.

In the in-house assembly line, high performance automatic placement machines by Siemens place large and small components in an extremely fast and precise way. The vapour phase soldering machine by the market leader Asscon differs from ordinary convection soldering furnaces by its extraordinarily gentle soldering process under protection gas atmosphere. This prevents oxidation and cold solder joints and improves the thermal connection of component and PCB. This is particularly advantageous for LEDs, whose aging scales with the operating temperature.

The entire process is flexibly adaptable to the requirements and batch sizes of our customers and runs fully automatically.

- State-of-the-art machinery with the latest technology
- Production of circuit boards with lengths of up to 600 mm
- Traceability thanks to laser bar codes

NICHIA UVC UVB LINEAR LED MODULE 12 X NICHIA LEDS 280-308NM 744-2400MW

- Maximum process safety with fully automated processing
- ISO certification



ISO 9001 quality management system.



OHSAS 18000 health and safety management system.



ISO 14001 Environment Management System

Our professional LED Strips and Modules use LEDs from market leaders

We develop and produce our LED strips at a state of the art facility in Germany, with the highest quality standards and by using only LEDs from market leaders such as Nichia, Samsung or Toshiba.


- **Nichia** is the LED market leader, with over 25% market share and decades of experience. Nichia researchers invented the blue and white LED production technology, also receiving the Nobel Prize for this achievement. Nichia LEDs are the **most efficient** (200 lm / w efficacy), durable (> 100,000 hours) and are also available with unique technologies such as **Optisolis**, CR198+ natural light spectrum and **Rsp0a**, special white light for horticulture.
- **Samsung** is in the top 10 of global LED manufacturers and a well-known brand, renowned for the high performance of its products combined with the competitive price
- **Toshiba** is a Japanese conglomerate with a history of more than a century, now specialized in semiconductors, electronics and hardware, with nearly 20,000 employees and an annual turnover of 40 billion USD. Toshiba has built the TRI-R technology and built the LED chips used in **SunLike CR197+ LEDs** produced by Seoul Semiconductor in South Korea. With the new **SunLike™ TRI-R™** technology from Toshiba-SSC (Seoul Semiconductor) and our strips and modules you can always enjoy a natural light source with the light spectrum very close to the sun.
- **Seoul Semiconductor** is in the top 10 of global LED manufacturers and renowned for innovation, durability and competitive price

Our strips have high quality components and professional support:


- We use LEDs from top brands and have superior designs
- We offer **professional support** for lighting projects
- The PCBs use high quality materials for best resistance, current flow and heat transfer
- Performance values in this datasheet match those in real world applications
- Function perfectly at high temperatures that would destroy many other strips

CONNECTION OF LED STRIP

NICHIA UVC UVB LINEAR LED MODULE 12 X NICHIA LEDS 280-308NM 744-2400MW

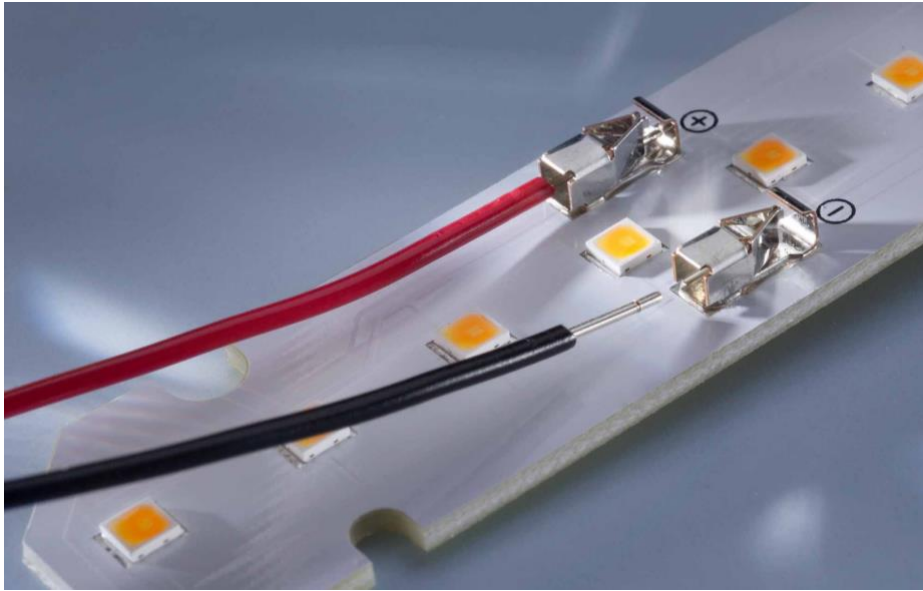

The professional PowerBar V3 strip is connected via a solderless connection to the connection inputs provided for this purpose. Recommend wire cross-section of inner conductor: $2 \times 0.75 \text{ mm}^2$ (AWG 18).

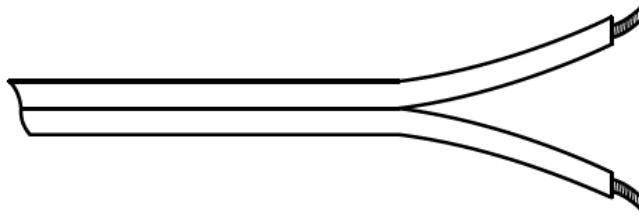

The PowerBar V3 can be cut into shorter lengths, up to an individual unit with one LED. For connecting these parts, soldering wires to the connection pad might be required.

Due to the special conditions in the production process of LEDs, the specified values are statistical averages. The individual LED may deviate from them.

The LED modules and all their components must not be mechanically stressed.

Avoid undue claw action, e.g. by screwing or excessive bending.

The LED modules must not come into contact with aggressive chemical substances, either in operation or in storage.

The installation of the module (with the operating device) must be carried out in compliance with all applicable electrical and safety standards.

Pay attention to standard ESD precautions when installing the modules.

- The components on the LED modules must not be subjected to mechanical stress.
- The conductive paths on the boards must not be damaged or interrupted by the installation.
- Store and operate the LED modules only at a final humidity of 10% to 60%.

Our LED modules are not protected against overload, overtemperature and short-circuit currents. To operate the modules safely and reliably, it is therefore necessary to use an electronically stabilized power supply unit in which these in which these safety functions are already integrated. If other power supplies than the ones distributed by us are used, the following protective

the following protective measures must be ensured on the power supply side:

MINIMUM REQUIREMENTS FOR POWER SUPPLIES: Short circuit protection - Overload protection - Overtemperature protection

NICHIA UVC UVB LINEAR LED MODULE 12 X NICHIA LEDS 280-308NM 744-2400MW

- The installation of LED modules may only be carried out in compliance with all applicable regulations and standards by an authorized electrician.

Distribution and reproduction of this document, utilization and communication of its contents are prohibited unless expressly permitted. Any infringement will result in compensation for damages. All rights reserved in the event of patent, utility model or design registration.

We reserve the right to make technical changes.

This LED strip can be purchased via the following websites:

www.ledrise.eu / www.lumistrips.com